

Frameduct is our made to measure, ready to install metal-framed non-plumbed system. It has all the cutting edge features you need but gives you the flexibility to choose your own sanitaryware.



Frameduct Easy installation

Frameduct's superbly crafted, metal-framed panelling has been created to give you quick and easy installation. Its clever click-fix mechanism is simplicity itself. Not only that, Frameduct gives you the opportunity to choose your own sanitaryware.

You need easy installation.

Frameduct brings you an intelligent, great looking system that's easy to install but with an added bonus - you get to choose your own sanitaryware.



01 Once the site has been prepared, fix the aluminium docking frame to the wall, ceiling and floor.

20 minute installation



02 Click-fix the first Frameduct unit onto the frame and slide into position. Open the mid panel to a fully hinged position. Attach a vertical flashgap to the frame on either side of the unit, screw-fixing to the frame from the face. Fix tie back to the wall. Repeat until all units are in place.

30 minute installation



03 Drill or cut out for sanitaryware.

10 minute installation



04 Mount sanitaryware and brassware.

20 minute installation



05 Once all the units are in position, connect the plumbing and services and apply silicone sealant to sanitaryware.

10 minute installation*




06 Simply close the hinged panel and attach the top and bottom panels of the units. Installation is complete.

5 minute installation

The comparisons given between Vepps, Frameduct and Rapiduct are a guide and are designed to help you choose the right product for your project. * Dependent on brassware.

Technical Specifying Frameduct

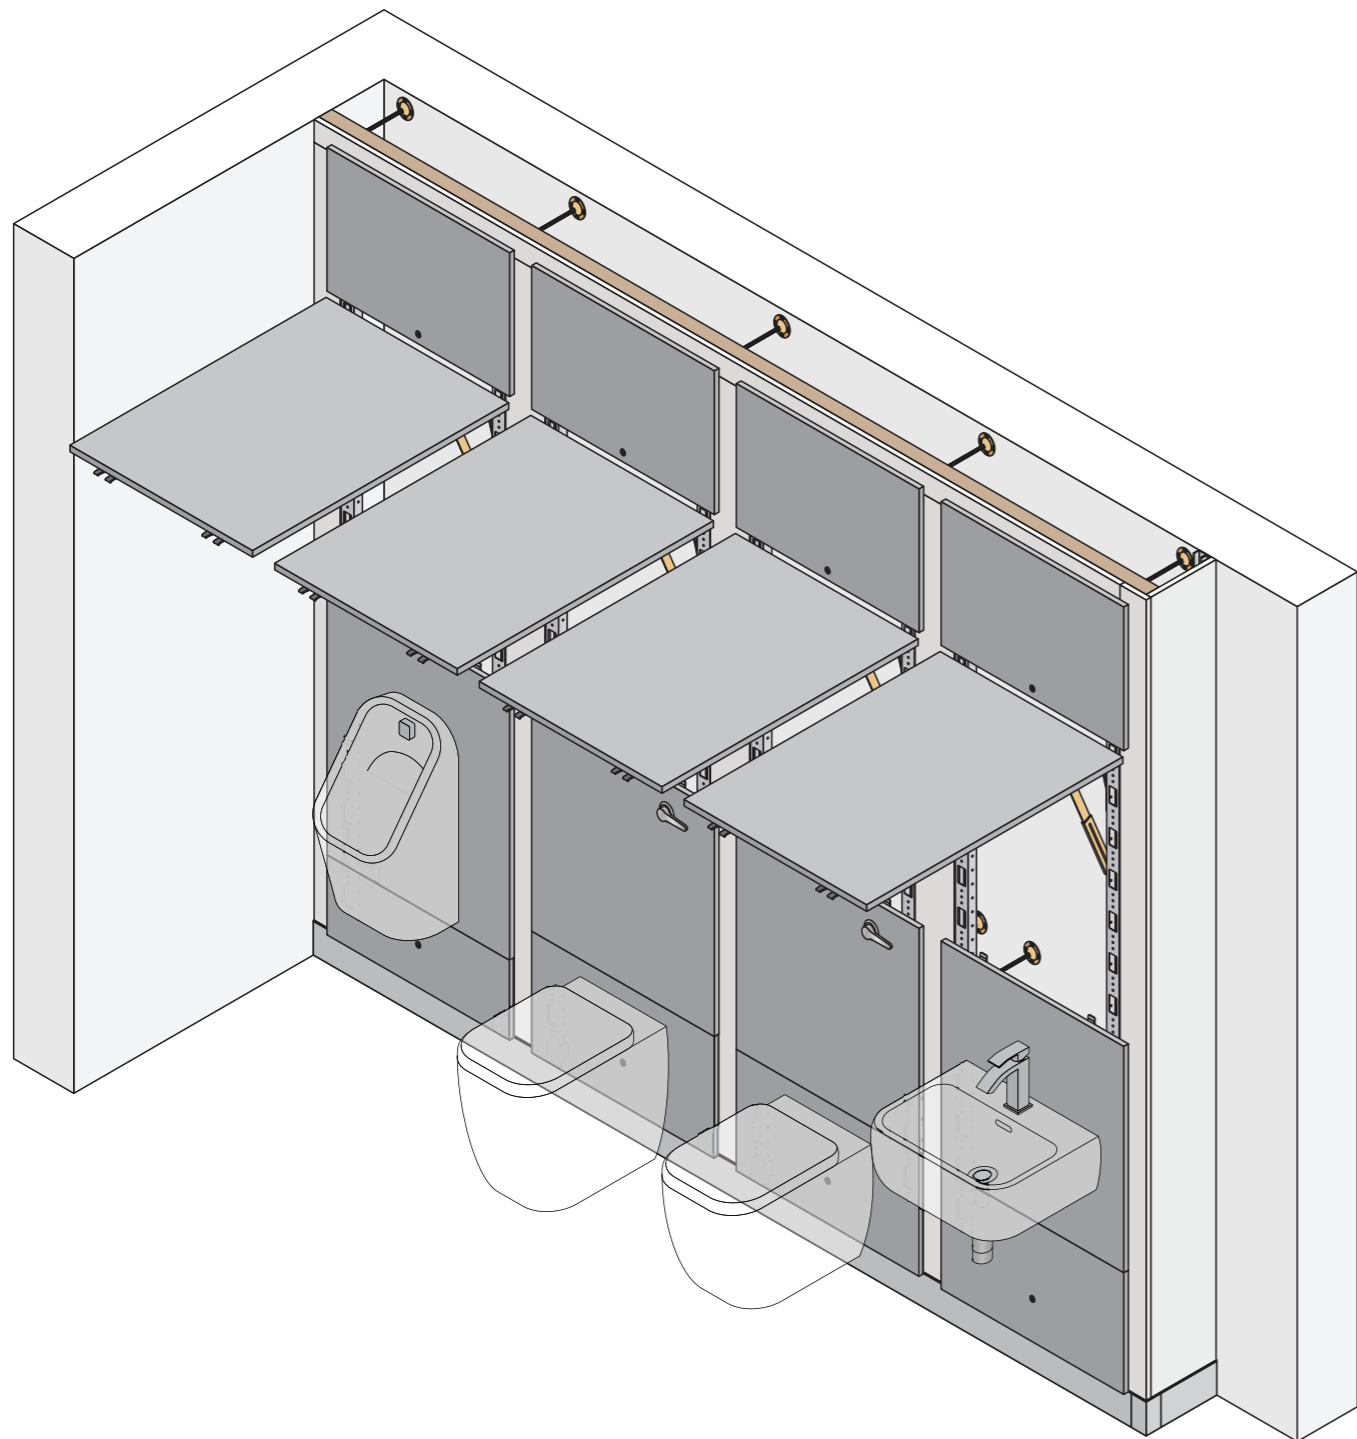

Dimensions

Maximum ceiling height*

MFC	3000mm
HPL	3000mm
SGL	3000mm

*Maximum heights subject to change with woodgrain colours.

Bespoke heights available.

Skirting/baserail height

100mm (other skirting heights achievable by site packing the baserail).

Top flashgap

50mm

Hinged Panels

Hinged and lockable panels available up to 850mm width.

Performance

Available in six material options, Frameduct is suitable for every type of wet or dry environment allowing you to specify the most appropriate panel option to meet the site requirements and your budget.

MFC

For dry environments with low risk of vandalism. Panels are manufactured from 19mm nominal thickness high performance moisture-resistant melamine faced chipboard. Edges lipped with ABS.

HPL

For more heavily used washrooms, panels are heat, scratch and impact resistant. Manufactured from moisture-resistant chipboard faced with high pressure laminate, panels are 19mm nominal thickness. Edges lipped with ABS. Post-formed vertical edge option available.

SGL

Solid grade laminate is extremely resistant to impact and all surfaces are impervious to water. Panels are 13mm nominal thickness with polished black radiused edges.

ColourCoat

Panels are 19mm nominal thickness MDF finished, sprayed with a coat of primer and finished with 20% gloss pigmented lacquer.

ColourCoat High Gloss

Panels are 18mm nominal thickness MDF finished, sprayed with a coat of primer and finished with 80% gloss pigmented lacquer.

Veneer

Manufactured from moisture resistant chipboard faced with real wood veneer, panels are 18mm nominal thickness. Edges lipped with matching ABS lipping.

Detailing

Panels

Available in MFC, HPL, SGL, ColourCoat, ColourCoat High Gloss and Veneer.

Flashgaps

MFC, SGL, ColourCoat, ColourCoat High Gloss and Veneer.

Colour finish

MFC, HPL and SGL

34 colours.

ColourCoat and ColourCoat High Gloss

10 ColourCoat and ColourCoat High Gloss colours available when specifying Frameduct with selected V1 and V2 cubicle ranges. Unlimited ColourCoat and ColourCoat High Gloss options (any classic RAL) when specifying Frameduct with selected V3 cubicle ranges.

Veneer

Wide range of Alpi veneer options (varying price points).

Edge treatment

MFC and HPL

Matching ABS lipping.

Post-formed vertical edge option available with HPL.

SGL

Polished black radiused edge.

ColourCoat and ColourCoat High Gloss

Edges are sprayed with a coat of primer and finished with 20% or 80% gloss pigmented lacquer, respectively.

Veneer

ABS lipping to match.

Flashgaps

Flashgaps have unfinished edges except return end flashgaps which will be ABS lipped (or polished if solid grade laminate).

Docking frame

Headrail and baserail manufactured from extruded aluminium section.

Subframes

Manufactured from rolled galvanised steel section with aluminium cross brace bars. Subframe installed within aluminium docking frame by click-fix nylon location brackets. Back panels fixed to steel section by nylon clips.

90° linear-bearing hinge™

Manufactured from zinc plated steel with chrome plated rivets and black glass filled nylon linear-bearing, set at fixed height of 1950mm.

Panel lock

Manufactured from stainless steel with a polished finish in set positions.